
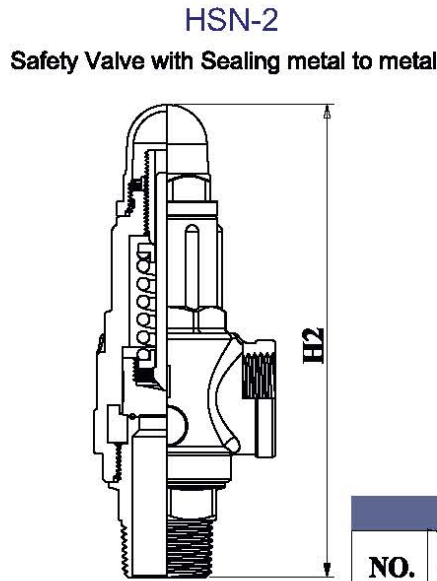



STAINLESS STEEL SAFETY VALVE

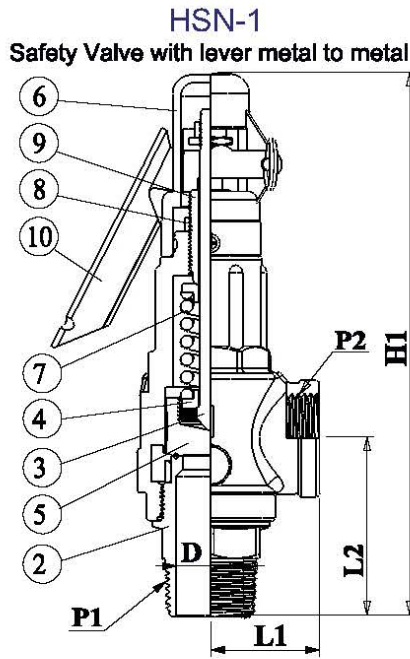

General material				
NO.	NAME	TYPE	HSN-1	HSN-2
1	VALVE BODY		SS304	SS304
2	VALVE SEAT		SS316	SS316
3	SPINDLE		SS304	SS304
4	SPRING SEAT		SS304	SS304
5	DISC		SS316	SS316
6	CAP		SS304	SS304
7	SPRING		SS304	SS304
8	NUT		SS304	SS304
9	ADJUST SCREW		SS304	SS304
10	HANDLE		SS304	-
WORKING PRESSURE(Kg°C)			0.3~10	
WORKING TEMP.(°C)			-196°C~350°C	

Dimension											
NOMINAL					LIFT	L1	L2	H1	H2	Weight (Kg)	
P1	*	D	*	P2						HSN-1	HSN-2
1/2	*	15	*	1	3	40	60.5	194.5	168.5	1.358	1.21
3/4	*	20	*	1	3	40	60	194	168	1.332	1.176
1	*	25	*	1	3	40	65.5	199.5	173.5	1.346	1.182
1 1/4	*	32	*	2	6	66	92	282.9	256.4	4.666	4.366
1 1/2	*	40	*	2	6	66	92.5	283.4	256.9	4.6	4.3
2	*	50	*	2	6	66	92.5	286.4	259.9	4.683	4.383

Male x Female(HSM-04) Female x Female(HSM-04F)

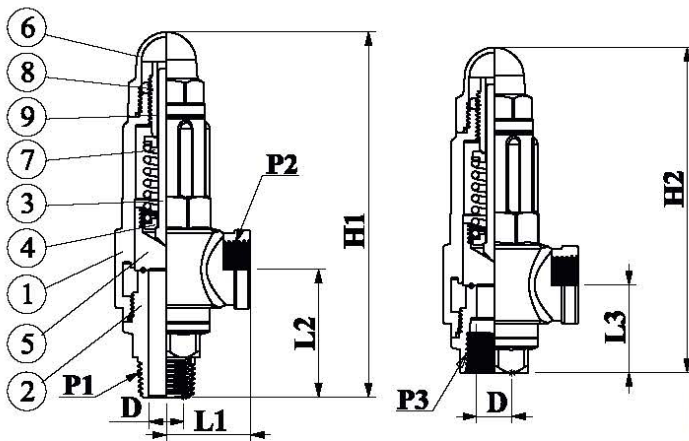

HSM-04
Safety Valve with Sealing
metal to metal



Dimension									
NOMINAL (Male)					LIFT	L1	L2	H1	Weight (Kg)
P1	*	D	*	P2					
1/2	*	13	*	1/2	3	31	46.96	134.1	0.522
NOMINAL (Female)					LIFT	L1	L3	H2	Weight (Kg)
P3	*	D	*	P2					
1/2	*	13	*	1/2	3	31	32.26	119.4	0.478

General material				
NO.	NAME	TYPE	HSM-04	HSM-04F
1	VALVE BODY		SS304	SS304
2	VALVE SEAT		SS316	SS316
3	SPINDLE		SS304	SS304
4	SPRING SEAT		SS304	SS304
5	DISC		SS316	SS316
6	CAP		SS304	SS304
7	SPRING		SS304	SS304
8	NUT		SS304	SS304
9	ADJUST SCREW		SS304	SS304
WORKING PRESSURE (Kg/cm2)			0.1~20	
WORKING TEMP (°C)			-196°C~350°C	